

FLOODLIGHT SERIES


400W FLOOD MH - die cast aluminium
400W FLOOD MV - die cast aluminium
400W FLOOD HPS - die cast aluminium

Features

Fully die-casting aluminium body with tempered glass; high-purity reflector; High performance; high temperature resistant anti corrosion.

Advantages:

Integral control gear, ballast mounted on the removable gear tray. Stainless steel screw; weatherproof and durable silicon rubber sealing gasket. Beam spread for asymmetrical photometric distribution;

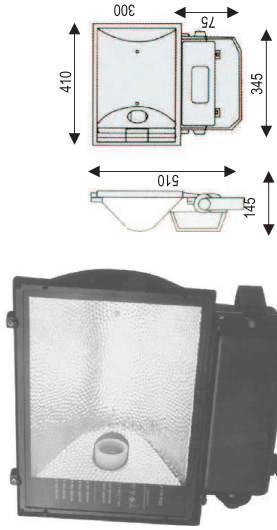


GES / E40 ENERGY SAVING FLOODLIGHT 400W FLOOD INCL ENERGY SAVING LAMP

400W FLOOD LIGHT BODY

GES ENERGY SAVING LAMPS
85W-E40-E/S-DL-L85W
105W-E40-E/S-DL-L105W

Features

Fully die-casting aluminium body with tempered glass; high-purity reflector; High performance; high temperature resistant anti corrosion.





125W FLOOD MERCURY VAPOUR

Features

Fully die casting aluminium; high-purity reflector; tempered glass; High performance; high temperature resistant, anti corrosion.

Advantages


Integral control gear, ballast mounted on the removable gear tray. Stainless steel clips; weatherproof and durable silicon rubber sealing gasket.

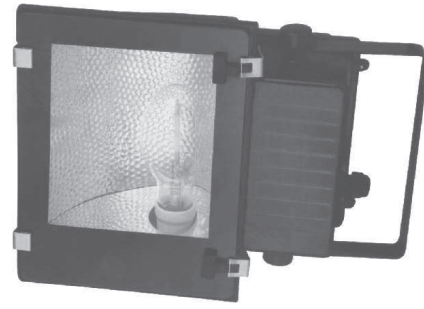

3-FL1016				
LAMP TYPE	MV125W			
MAX WATT	125W			
LAMP HOLDER	E27			
REFLECTOR	ASYMMETRICAL			
IP	65			



PL ENERGY SAVING FLOOD LIGHTS



Features

Fully die-casting aluminium body with tempered glass; high-purity reflector; High performance; high temperature resistant; anti corrosion.

218WPL-FLD-F2X18W
226WPL-FLD-F2X26W

2D LAMPS 2D 16W2P-DL-L



Lifetime 8000h,
Triphosphor,
Color temperature 6500K
2 PIN

GU 10 ENERGY SAVING LAMPS


GU10E/S9W-CW-L 9W
GU10E/S11W-CW-L 11W
COLOUR COOL WHITE
240 VOLTS



GU 10 LED GLOBES - 24 LED

Product Features:

1. Environment friendly and energy saving, long lifespan, high brightness, good colour rendering and low power consumption;
2. Shockproof and moisture proof and antidistortion;
3. High quality LEDs as the light source;
4. 240 volt only.



VAPOUR PROOF T8 FITTING

VP-22FL-F2X18W
VP-24FL-F2X36W
VP-25FL-F2X58W



Product Size in mm

	L	W	H
VP-22FL-F2X18W	655	131	93.5
VP-24FL-F2X36W	1270	131	93.5
VP-25FL-F2X58W	1565	1565	93.5

Features

MATERIAL SOLUTION FOR PLASTIC: ✓ PC BASE +PC COVER ✓ ABS BASE + PC COVER
MATERIAL SOLUTION FOR CLIPS: ✓ PC CLIPS ✓ STAINLESS STEEL CLIPS

OPEN FLUORESCENT

HIGH QUALITY

OPEN FLUORESCENT 1X18 - 2 ft	OC-12FL-F
OPEN FLUORESCENT 1X30 - 3 ft	OC-13FL-F
OPEN FLUORESCENT 1X36 - 4 ft	OC-14FL-F
OPEN FLUORESCENT 1X58 - 5 ft	OC-15FL-F
OPEN FLUORESCENT 2X18 - 2 ft	OC-22FL-F
OPEN FLUORESCENT 2X30 - 3 ft	OC-23FL-F
OPEN FLUORESCENT 2X36 - 4 ft	OC-24FL-F
OPEN FLUORESCENT 2X58 - 5 ft	OC-25FL-F

Product Features:

The lamp body uses the high quality steel plate, the entire plastic processing, convenient in installation and durable in service life.



T5 STRIPLIGHT FITTINGS - INCLUDING LAMP

T5 8W FITTINGS-300mm-6400K	T5-8W-SL-F
T5 14W FITTINGS-600mm-6400K	T5-14W-SL-F
T5 21W FITTINGS-900mm-6400K	T5-21W-SL-F
T5 28W FITTINGS-1200mm-6400K	T5-28W-SL-F
T5 54W FITTINGS-1200mm-6400K	T5-54W-SL-F
T5 35W FITTINGS-1500mm-6400K	T5-35W-SL-F
T5 80W FITTINGS-1500mm-6400K	T5-80W-SL-F



Available in

Warm White
Cool White
Day Light


T5 Fluorescent Tubes

The T5 is a versatile and effective source of illumination that is ideal for factories, schools, offices, supermarkets, underground railways etc.

Colour Characteristics

By using rare-earth phosphors, T5 fluorescent lamps achieve improved colour rendering and high efficacy. The correlated colour temperature (CCT) and colour rendering index (CRI) of the lamps is determined by the phosphors used in the manufacturing process. The CRI of T5 lamps can be specified from 70 to the mid-90s. For good quality lighting it is advisable to specify a CRI of at least 80.

T5 8W LAMPS DAYLIGHT 6500K	T5-8W-SL-DL-L	6400K
T5 14W LAMPS DAYLIGHT 6500K	T5-14W-SL-DL-L	
T5 21W LAMPS DAYLIGHT 6500K	T5-21W-SL-DL-L	
T5 28W LAMPS DAYLIGHT 6500K	T5-28W-SL-DL-L	
T5 54W LAMPS DAYLIGHT 6500K	T5-54W-SL-DL-L	
T5 35W LAMPS DAYLIGHT 6500K	T5-35W-SL-DL-L	
T5 80W LAMPS DAYLIGHT 6500K	T5-80W-SL-DL-L	



RADIOQAL
LIGHTING
JUST LIGHT IT



CONTACT US

48 Flamingo Street, Lenasia, Jhb, South Africa, 1820,
P.O. Box 727, Lenasia, Jhb, South Africa 1820
Tel: +27 11 854 1400 Fax: +27 86 623 2039

www.radioqal.co.za



www.radioqal.co.za